



THE CLEAR 1-STEP CHOICE TO CREATE WRITABLE SURFACES



FEATURES

- **EASY TO APPLY**
SherWrite is a Clear "rolled on" Coating, and is the easiest to apply.
- **UNLIMITED DESIGN FLEXIBILITY**
Unlimited color palette: base paint is tinted as desired.
- **NO MESS**
SherWrite is a single component with no mixing of two cans like other Dry Erase products (1 Quart= 200 sq. ft. coverage).
- **NO ODOR**
SherWrite has a low VOC with little or no odor making it suitable to be applied in occupied settings.
- **MORE FORGIVING INSTALLATION**
SherWrite does not dry out quickly like other products when applying.
- **ONE YEAR SHELF LIFE**
Unused product can go back into the can and be used for future projects.
- **DESIGNED FOR COMMERCIAL APPLICATIONS**
SherWrite has a ten-year warranty.

Visit SherWrite.com
for Specifications, Installation Instructions and more.

TECHNICAL DATA

Item #TS-Snap-1
Single Component
Clear Coating
Dry Erase Paint

Kit Details:

200 sq ft coverage
2 roller covers
Installation Instructions
Paint Can Opener

INSTALLATION INSTRUCTIONS

Step 1

Apply Sherwin Williams ProMar tinted to the desired color. Wait 24 hours before proceeding further.

Step 2

Inspect surface for any unwanted texture. If present, lightly sand surface to ensure it is as smooth as possible. Then clean with a microfiber cloth. Stir the product well prior to use and only apply with provided Foam Roller Cover. Apply over the painted wall using a vertical up and down coating method being sure to keep wet edge at all times.

Wait 5 days for product to cure. Begin using your new Dry Erase Wall. We recommend the use of EXPO BULLET Low Odor markers and microfiber erasers.

For full detailed installation instructions go to SherWrite.com

TEST RESULTS

Test	ASTM Method	Result
VOC	D3960	4 g/l
Density	D1475	9.44 lbs/Gal
Sag Resistance	D4400	<3 mils
Crack Resistance/Elongation	D522	>32%
Gloss 60 degree	D523	85-90 @ 3 mil coating
QUV/500 Hrs, UVA 340	D4587	Visual Gloss Change - Minimal Visual Color Change - None Other Detrimental Film Effects - None DE = 40
Flammability	E-84	Flame Spread - 5 Smoke Development - 0
Flashpoint	D92	> 200 F
Scrub Resistance	D2486	> 15,000 Cycles
Washability	D3450	98.8%




SHERWRITE

Dry Erase

SHERWRITE Dry Erase Coating is a perfect solution to create seamless dry erase walls of any color. This clear coating goes over interior latex eggshell paint tinted to color.

Simply paint the wall, wait 24 hours and then roll on SHERWRITE Dry Erase Coating. Wait 24 hours and then begin collaborating on the wall using dry erase markers and erasers. This coating dries crystal clear, allowing the beauty of the painted surface to show thru.

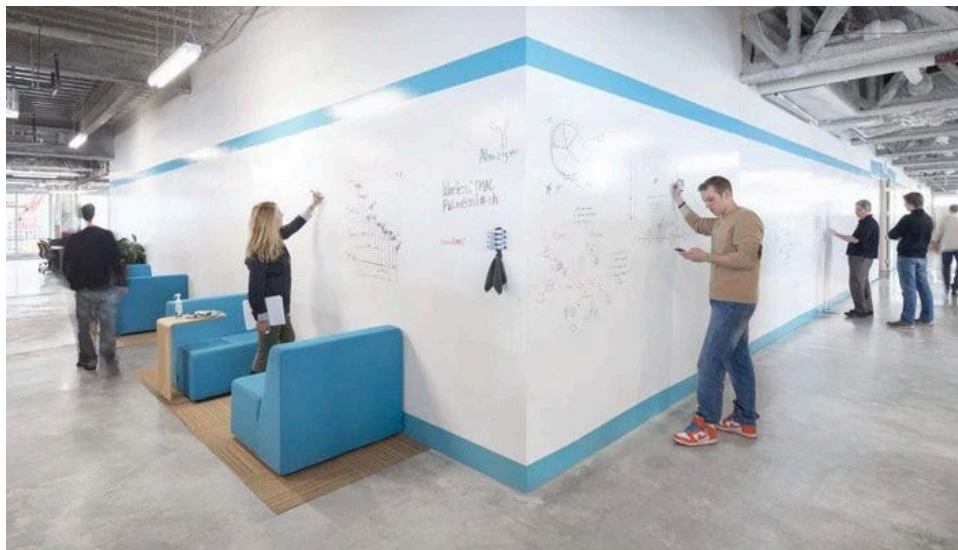

SHERWRITE Dry Erase Coating

www.SherWrite.com

• Advantages of SHERWRITE Dry Erase Coating

	SHERWRITE COATING	Other Brand I	Other Brand W	Other Brand F
SURFACE PREP	APPLY INTERIOR LATEX EGGSHELL TINTED TO DESIRED COLOR	PRIME KILZ LET DRY 24 HRS, APPLY 2 COATS OF SEMI GLOSS OR GLOSS PAINTS WAIT 24 HRS	PRIME COAT, THEN PAINT WITH EGGSHELL OR GLOSSIER	PRIME WITH EGG SHELL PAINT WAIT 24 HRS BEFORE COATING
COATING APPLICATION	APPLY SINGLE COAT EVENLY OVER PAINTED SURFACE	1 THIN COAT WAIT 5MIN, APPLY 2ND COAT, DRIES QUICKLY WORK FAST.	WHEN APPLYING COATING MUST KEEP WET EDGE. PAINT IN ONE DIRECTION ONLY	1ST COAT IN 70-80 SQ FT AREA. REPEAT 2ND COAT. ROLL SAME DIRECTION.
YIELD OF PRODUCTS	200 SQ FT PER QUART.	100 SQ FT PER QUART(2 COATS)	100 SQFT PER QUART	100 SQ FT PER QUART(2 COATS)
POT LIFE	ONE COMPONENT UP TO 2HRS	MIX TWO COMPONENTS, LESS THAN 1HR.	MIX TWO COMPONENTS, LESS THAN 1 HR.	MIX TWO COMPONENTS, 3 TO 4 HRS.
VOC	LESS THAN 5 G/L	LESS THAN 125 G/L	LESS THAN 50 G/L	LESS THAN 100 G/L
CURE TIME	5 DAYS	7 DAYS	5 DAYS	5 DAYS
OPEN TIME TO GO BACK INTO COATING & TOUCH-UP	UP TO 1HR	CAN'T GO BACK IN COATING	CAN'T GO BACK IN COATING	CAN'T GO BACK IN COATING
ROLLER COVERS	FOAM (NO LINT), NO OVER LOAD	3/8" MICROFIBER	1/4" MICROFIBER	1/4" SHORT NAP
SMELL OF PRODUCTS	NO ODOR TO SLIGHT	STRONG	MILD	STRONG
UNUSED PRODUCT	POUR BACK INTO CAN AND REUSE	NO CAN'T BE REUSED	NO CAN'T BE REUSED	NO CAN'T BE REUSED
SHELF LIFE OF PRODUCTS	1 YEAR	1 YEAR	1 YEAR	1 YEAR
SIZE OF PRODUCTS	200 SQ FT QUART	100 SQ FT QUART	100 SQ FT QUART	100 SQ FT QUART OR 400 SQFT GAL
WHAT IS PROVIDED IN A KIT	ROLLER COVER, STIR STICK, AND OPENER	2 ROLLER COVERS AND STIR STICK	COATING ONLY	ROLLER COVER AND STIR STICK
COMPONENTS	ONE	TWO: MIXING REQUIRED	TWO: MIXING REQUIRED	TWO: MIXING REQUIRED
POST APPLICATION TREATMENT	NO	NO	YES	NO
LAYOFF IN ONE DIRECTION	NO LAYOFF OR WET EDGE REQUIRED	MUST LAYOFF IN ONE DIRECTION, MUST MAINTAIN WET EDGE	MUST LAYOFF IN ONE DIRECTION, MUST MAINTAIN WET EDGE	MUST LAYOFF IN ONE DIRECTION, MUST MAINTAIN WET EDGE.
BACK ROLL TO SMOOTH APPEARANCE	YES CAN BACK ROLL, IF NEEDED	NO CAN'T BE BACK ROLLED	NO CAN'T BE BACKED ROLLED	NO CAN'T BE BACKED ROLLED
COATS OF PRODUCT	ONE	TWO COATS	ONE	TWO COATS
CUT IN WALLS	UP TO 1 HR BEFORE APPLYING COATING	MUST CUT IN AS YOU ROLL WALL.	MUST CUT IN AS YOU ROLL WALL.	MUST CUT IN AS YOU ROLL WALL.
SHIPPING	FREEZE THAW- CAN BE SHIPPED IN COLD WEATHER. CAN BE SHIPPED BY AIR.	CAN'T BE SHIPPED IN COLD WEATHER, WILL FREEZE CAN'T USE.	CAN'T BE SHIPPED IN COLD WEATHER, WILL FREEZE CAN'T USE.	CAN'T BE SHIPPED IN COLD WEATHER, WILL FREEZE CAN'T USE.